


Mini USB Connector and Cable Assemblies Input/Output

DESCRIPTION

- Designed to Meet the USB 2.0 Specifications
- Single 5-Position (one ID pin) Receptacle Connector Polarized for Proper Orientation
- Used in Next Generation High Density Computer Peripherals, PDA's, Palm Tops and Cell Phones
- Designed for 480MB/s Transfer Rate

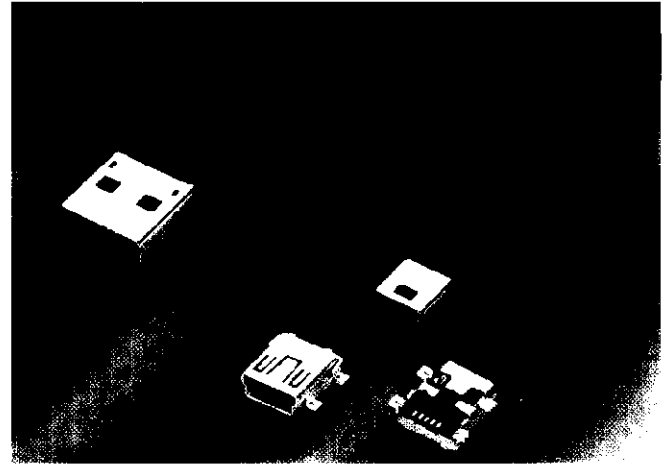

APPLICATIONS

- Supports latest technology for personal computer "Plug and Play" peripheral connectivity
- Uses Serial Bus Technology to connect USB personal computers to PDA's, Cell Phones, Video Cameras, Scanners, Printers, Keyboard and Mouse

PRODUCT STRENGTHS

- High Density design, allow for all the benefits of USB in a smaller package than traditional USB Connectors
- Four solder hold downs, provide stability in mating and unmating by preventing stress on SMT connector leads
- Mini-B Receptacle keyed to allow device to act as a peripheral
- Available Soon - Mini A/B Receptacle keyed for devices that can act as a host or peripheral

TECHNICAL DOCUMENTS

- Tyco Product Specification and Customer Drawings
440247-1 Tray
440247-2 Tape and Reel

FOR MORE INFORMATION

Technical Support Center

Phone: 1-800-522-6752

Internet: www.amp.com

E-mail: product.info@amp.com

- Gary Kneiss Tel: 717-592-5096 Fax: 717-592-3588
Connector Product Manager
E-mail: gskneiss@tycoelectronics.com

- Dan McClure Tel: 717-986-7812 Fax: 717-592-7402
Engineer
E-mail: demcclur@tycoelectronics.com

- Jeff Biss Tel: 717-986-3102 Fax: 717-986-3410
Cable Assemblies Product Manager
E-mail: jlhbiss@tycoelectronics.com